

MICROINVERTER

EVT560


Connected to two panels.



SAFE
Low DC voltage,
and invisible.




QUALITY
Components selected from
world-class brands.



OPTIMIZATION
Individual MPPT for
each module.



FLEXIBILITY
Adapts to any system size
and optimizes space.



PLUG & PLAY
Hand-in-hand design, fewer
add-ons, and fast installation.



25 YEARS
Long 25 years lifetime;
up to 15 years warranty.



SMART
Module-level online smart
monitoring.

DATASHEET

Model EVT560

Input Data (DC)

Recommended Input Power Range(STC)	(180W - 360W+) *2
Max. DC Input (V)	54V
Isc PV (Absolute Max.) (A)	15A
Operating Range (V)	18V-54V
Max. Input Current (A)	12A*2
MPPT Voltage Range (V)	24-45V

Output Data (AC)

Normal Voltage (Vac)	220V/230V
Current (Max.continuous) (A)	50Hz/60Hz
Frequency (Hz)	2.55A
Power (Max.continuous) (W)	560W
Power Factor/Rated (default)	>0.99
Total Harmonic Distortion	<3%
Maximum Units Per Branch	10 Units (12AWG Cable)

Efficiency


Peak Inverter Efficiency	95.6%
EURO Weighted Efficiency	95%
MPPT Efficiency	99.9%
Nighttime Power Consumption	<100mW

Features

Communication	PLCC(Power Line Communication)
Compliance	VDE-AR-N 4105, VDE0126-1-1, UTE C15-712-1, EN50438, IEC/EN62109-1/2, IEC/EN61000, AS4777, IEC61727, IEC61683, IEC62116
Lifetime	25 Years

Others

Ingress Protection (IP)	IP 67
Protective Class	Class I
Temperature (°C)	-40°C to +65°C
Relative Humidity	0% - 98%
Overvoltage Category	OVC III (AC Main), OVC II (PV)
Inverter Isolation	<input type="checkbox"/> Non-isolated <input checked="" type="checkbox"/> High Frequency Isolated
Weight	2.8kg
Dimensions	248mm*236mm*27.5mm

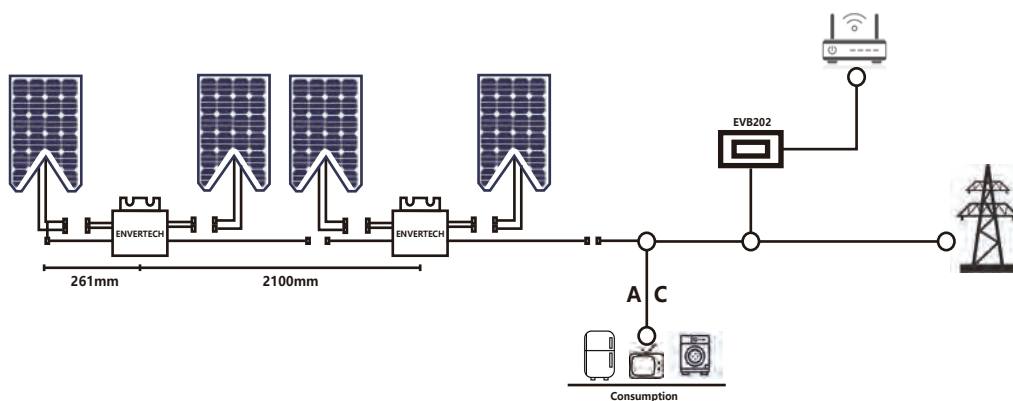

Monitoring Device EVB202

communicates with Envertech microinverters through PLCC and enables users to manage the systems in a smart digital way.